

— EST. 2010 —

# WALLUMS


WALL DECOR

REDEFINE YOUR WALLS

\*\*\*

## USEFUL ITEMS TO HAVE ON HAND

////////////////////////////////////

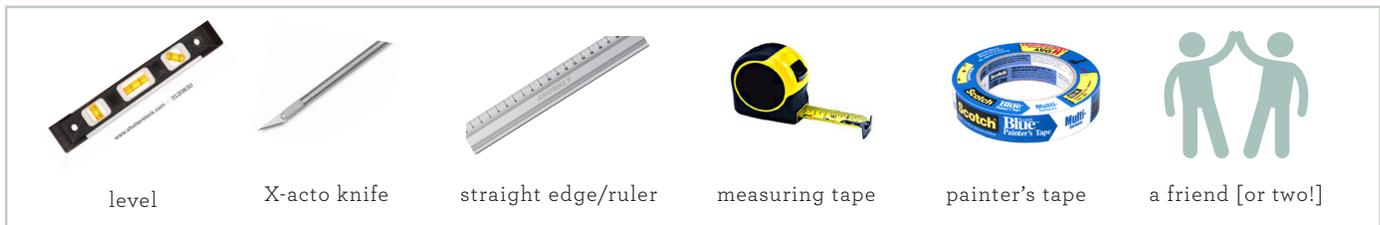

**PLEASE READ THESE INSTRUCTIONS THOROUGHLY BEFORE ATTEMPTING YOUR INSTALLATION.** Wallums wall murals can be applied to any smooth surface such as walls, glass, metal, wood, mirrors, etc. Your new wall fabric mural can be repositioned many times. You can even save the backing paper and apply the decal back to the backing paper for storage while you are moving to a new location. If you have any questions, please e-mail us at [info@wallums.com](mailto:info@wallums.com).

## BEFORE YOU BEGIN



////////////////////////////////////

We highly recommend you have at least one friend help you install your new wall mural. When you first receive your package, you will want to unroll the decal and inspect it for defects. If there are any, please take a picture of both the damaged mural and the shipping box, and contact us for a replacement.

## PREP YOUR SURFACE

////////////////////////////////////

Before applying, make sure your surface is dry and free of dust, dirt, or grease. Make sure your wall is nice and smooth and fill any cracks and holes with spackle and sand until smooth.



## MAKE A SURFACE GUIDELINE

////////////////////////////////////


Use your level to make a straight vertical pencil line on the wall where your first panel will touch. This will be your guideline for the side of your first mural panel.

## APPLY YOUR FIRST PANEL

Starting with the top of the first panel, peel back the backing paper 6-10" and cut or roll the exposed backing paper. Lining up with your guideline, apply the sticky side of the panel to your surface by smoothing it onto the wall with your hand. Because not all walls and ceilings are straight, we recommend keeping about 1" of extra material on the edges to ensure you don't end up with part of the wall uncovered. This excess can be trimmed off later. *Do not peel off the entire piece of backing paper all at once - this will make it harder to install without bubbles.*




Continue pulling off the backing paper in small increments while smoothing the mural against the wall using light pressure with your hand starting from the center, working your way out. If you get any wrinkles or bubbles, simply peel up that part of the panel and try again.

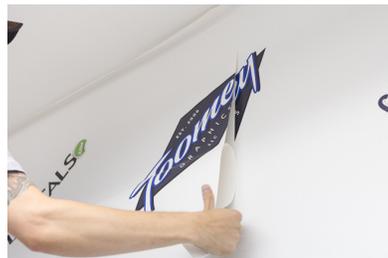

## APPLY ADDITIONAL PANELS

Align your second panel to the first. There will be a slight overlap. Simply match the pattern to the first panel and repeat the previous process for each mural panel.

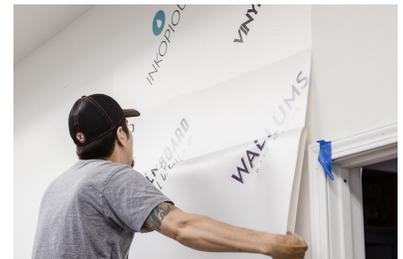

**REALIGNING PANELS** If you find yourself with a panel that doesn't seem to line up, no need to worry! Gently lift the panel from the surface keeping it flat and parallel to the wall and simply re-apply it.



## TRIM OVERAGE

When all panels have been installed, trim any ceiling and baseboard overage using a straight edge and a sharp fresh blade. For best results, go slow and change blades often.



## OPTIONAL - DOUBLE CUT OVERLAPPING SEAMS

If you prefer not to have the panel overlaps, you can easily trim off this excess material. Starting at the top, place a ruler in the middle of where the two panels overlap and make a single cut through both layers of panels using a sharp blade. Peel away the outer strip of excess material then lift the edge of the panel and remove the remaining excess from underneath. Smooth the panel back into place and enjoy a less prominent seam between each panel!

